


SL-592

KeyGuard Lock Box

Wall Mount

COMBINATION SET/ RESET INSTRUCTIONS

You can set a new combination for your KeyGuard any time by following the below directions:

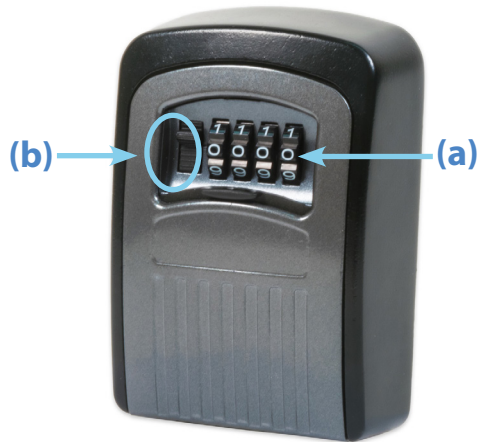

(c)
Reset
Lever



Reset Mode




Use Mode

OPENING

1. Open shutter hatch to reveal the dial and the opening lever.
2. Set dials (a) to opening combination. Factory default is **0-0-0-0**.
3. Press down on the opening lever (b) to open the compartment.

SETTING NEW COMBINATION

1. Open the compartment (see above steps 1, 2 and 3) to reveal the combination reset mechanism.
2. Push the reset lever (c) left and towards you. The reset lever will stay in the Reset Mode while you set your new code.
3. Rotate dials to your preferred combination.
4. Make a note of the new combination.
5. Return the reset lever to its original original position (Use Mode).
6. **IMPORTANT:** Double-check your combination before closing the storage compartment door.
7. Close the storage compartment.
8. Scramble the combination dials to lock the front door and conceal your combination.
9. Close the shutter hatch.

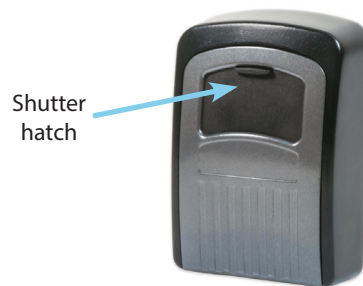

See Page 2 for wall mounting instructions.

SL-592

KeyGuard Lock Box

Wall Mount

COMBINATION SET/ RESET INSTRUCTIONS

WALL MOUNTING KEYGUARD

SUGGESTED TOOLS: Phillips-head screw driver, pencil or other marking device, level, drill & drill bit, hammer.

1. Open the open the compartment (see OPENING on page 1).
2. Position the lock box on the desired mounting surface.
3. Use a level to check that the lock box is vertical.
4. Mark the position of the screw holes to be drilled.
5. Remove the lock.
6. Drill holes.
7. Use a hammer to install wall plugs (if necessary).
8. Position lock for mounting.
9. Insert and tighten screws into place.
10. Close the storage compartment.
11. Scramble the combination dials.
12. Close the shutter hatch.

USING KEYGUARD

1. Enter your combination.
2. Press down on the opening lever to open the compartment.
3. Retrieve or add items to the compartment.
4. Close the compartment door.
5. Scramble the dials.

IMPORTANT NOTES

1. We suggest you mount the KeyGuard lock box in a discrete location away from direct view to minimize possible theft attempts.
2. Keep the shutter hatch closed to increase weather resistance and to conceal the dials from view.